

# 808nm 500mW Single Diode Laser(In)

## Applications

- Medical Illumination
- Target Indication
- Laser Show
- Stage Lighting




## Parameters (20°C)

TO9 Package Single Diode Laser (In)					
Item	Parameter	Unit	LDM-0808-500m-*2		
			Min.	Typical	Max.
Optical Parameter	Output power	mW	-	500	-
	Lasing Wavelength	nm	803	808	813
	Spectral Width	nm	-	1.0	2.0
	Emitting Area width	μm	-	50	-
	Temperature Coefficient	nm/°C	-	0.30	-
	Fast Axis Divergence	deg	-	30	35
	Slow Axis Divergence	deg	-	5	8
Electrical Parameter	Slope Efficiency	W/A	1.00	-	-
	Threshold Current	A	-	0.10	0.15
	Operating Current	A	-	0.50	0.65
	Operating Voltage	V	-	1.75	2.00
Others	Package	-	TO9		
	Operating Temperature	°C	10 ~ 50		
	Storage Temperature	°C	-10 ~ 60		



## Package Information

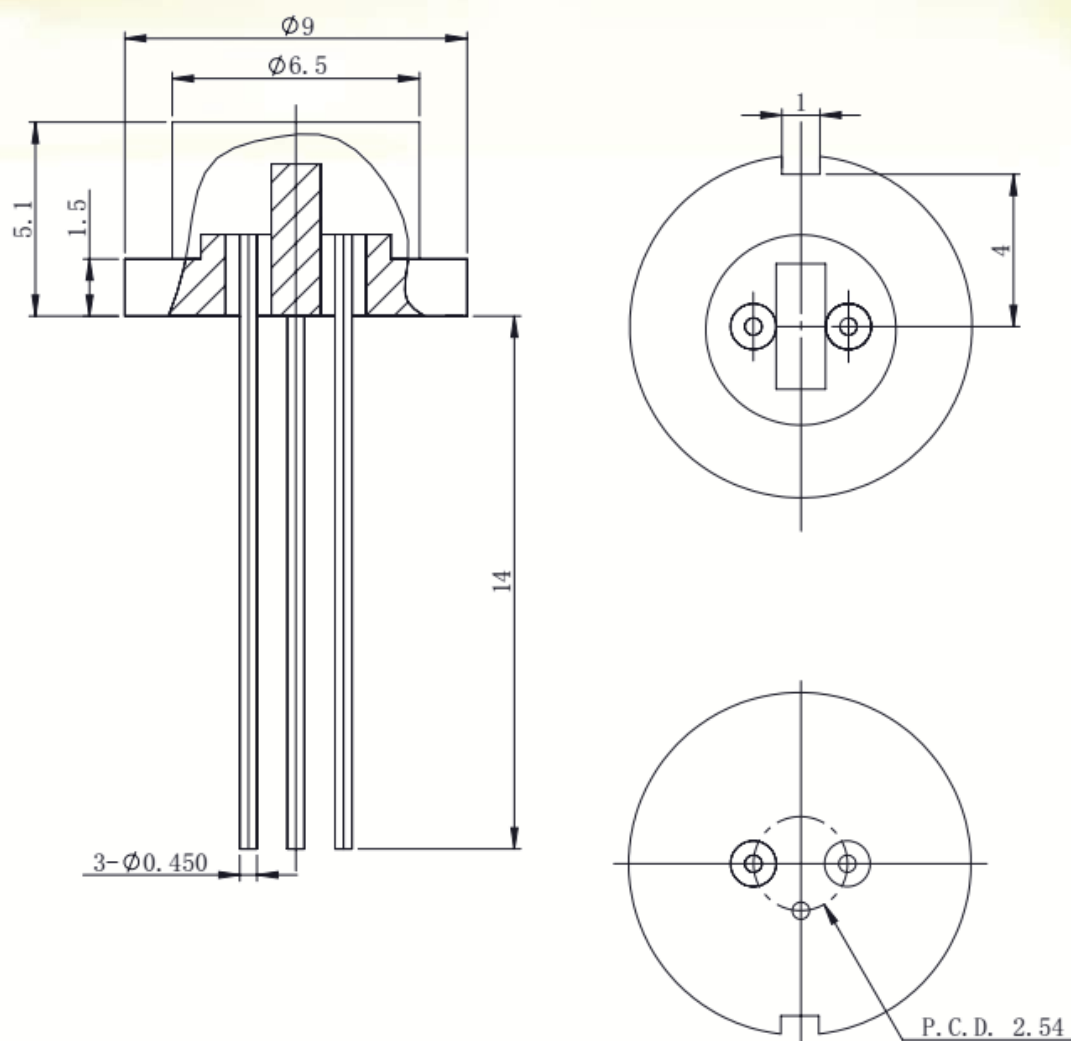

T09 Package





海特光电有限责任公司  
Hi-Tech Optoelectronics Co., Ltd.

## Notice

---

1. Item model notice: LDM(Item model),\*\*\*\*( Center wavelength),\*\*\*\*(Output power), \*\*(Heat sink structure and item width).
2. Data in the sheet are all basis on TO9 package sub-mount testing.
3. For more information, please contact Hi-Tech Optoelectronics Co., Ltd.



Add: Shahe Industrial Park, Changping District, Beijing, China  
Tel: +86-10-6076 9887 Fax: +86-10-6076 9887-699  
Web: [www.htoe.com.cn](http://www.htoe.com.cn) Email: [sales@htoe.com.cn](mailto:sales@htoe.com.cn)

