




808nm Horizontal Stack (Quasi-continuous)

Introduction

808nm Horizontal array,, which can achieve continuous or quasi-continuous high power output, is widely applied in laser pumping, cutting and medical,etc.

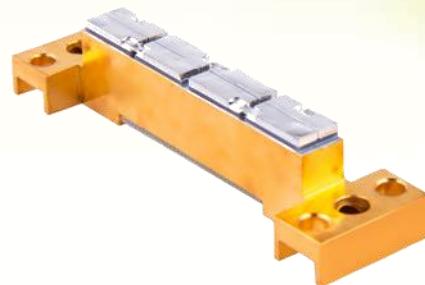

Parameters (25°C)

Horizontal Stack (Quasi- Continuous)			
Parameter		Unit	LDAQ3-0808-***
Optical Parameter	Operation Mode	-	QCW
	Center Wavelength	nm	808 ± 5
	Output Power/Bar	W	100
	Bar Qty.	bar	3/4/5/6/9
	Bar Space	mm	
	Spectral Width	nm	< 5
	Wavelength& Temperature Ratio	nm/°C	0.28
	Fast Axis Divergence	deg	< 35
	Slow Axis Divergence	deg	< 10
Electrical Parameter	Threshold Current	A	< 22
	Operating Current	A	< 120
	Operating Voltage/Bar	V	< 2.1
Thermal Parameter	Operating Temperature	°C	15 ~ 35
	Storage Temperature	°C	-10 ~ 60



Add: Shahe Industrial Park, Changping District, Beijing, China

Tel: +86-10-6076 9887

Fax: +86-10-6076 9887-699


Web: www.h toe.com.cn

Email: sales@htoe.com.cn





Package Information

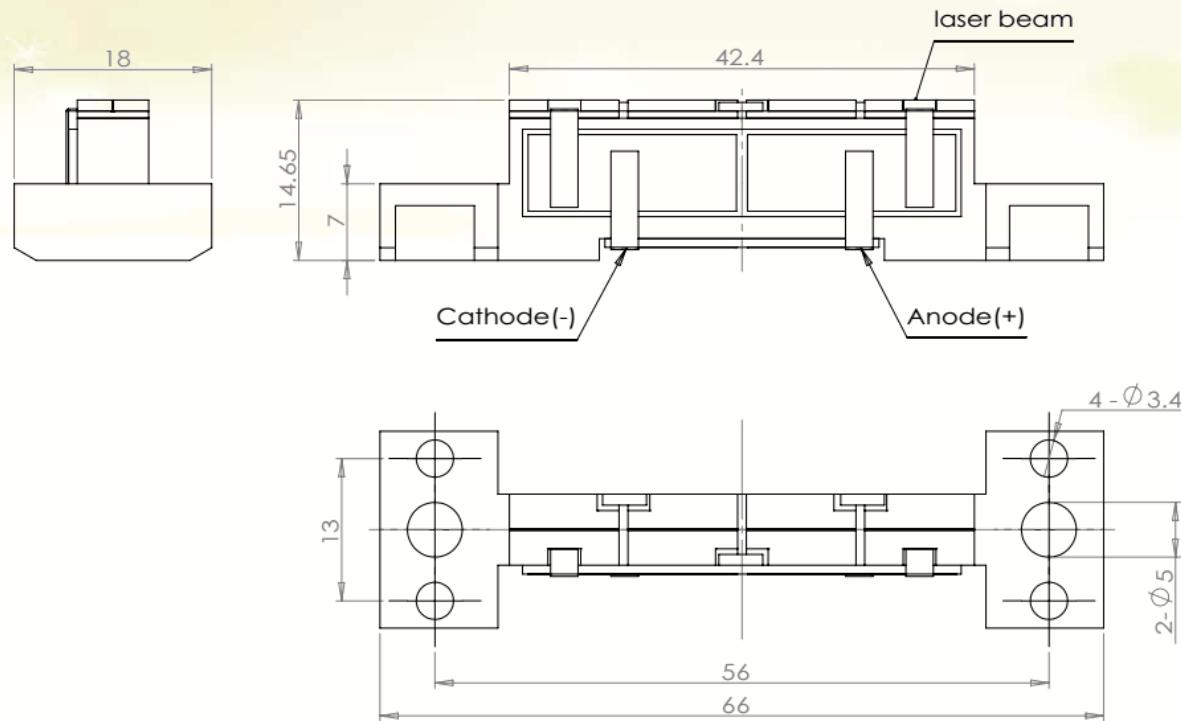

Notice

1. Item model notice: LDAQ3(item model)-0808(center wavelength)-*****(output power)
2. Package data is only for reference, which can be customized as client's design drawing.
3. Please make sure laser diode is operated within 15-35°C, as higher temperature will cause increased threshold current, lower exchange rate and accelerate the aging.
4. Please take measure to avoid of condensation, which will cause aging of laser diode.
5. For more information, please contact Hi-Tech Optoelectronics Co., Ltd.



Add: Shahe Industrial Park, Changping District, Beijing, China
Tel: +86-10-6076 9887 Fax: +86-10-6076 9887-699
Web: www.h toe.com.cn Email: sales@htoe.com.cn

