


# 808nm 1W Chip

## Introduction

808nm laser diode is packaged on standard C-Mount heat sink, or better heat sink ones, which also can be adopted in Medical Illumination, Target Indication, Laser Show, Scientific Research.

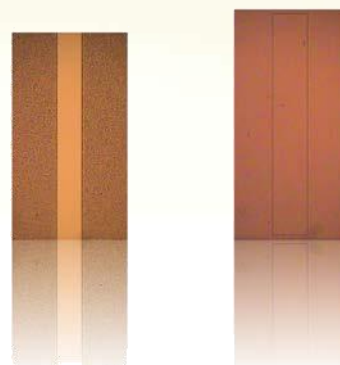

## Parameters (25°C)

808nm 1W Chip			
Parameter		Unit	CLDM-0808-001W
Optical Parameter	Output Power $P_o$	mW	1000
	Center Wavelength $\lambda_c$	nm	$808 \pm 5$
	Beam Divergence $\theta_{\perp} \times \theta_{//}$	deg	38x10
	COD	W	$\geq 2.00$
Chip Size	Emitting Area	$\mu\text{m}$	100
	Period	$\mu\text{m}$	500
	Cavity Length	$\mu\text{m}$	900
Electrical Parameter	Slope Efficiency $E_s$	W/A	$\geq 1.00$
	Threshold Current $I_{th}$	A	$\leq 0.24$
	Operating Current $I_f$	A	$\leq 1.25$
	Operating Voltage $V_f$	V	$\leq 2.00$





海特光电有限责任公司  
Hi-Tech Optoelectronics Co., Ltd.

## Notice

---

1. Item notice: CLDM item model)-\*\*\*\*( center wavelength)-\*\*\*\*( output power)
2. Data sheet is basis on the result of under 25°C testing.
3. Data sheet is basis on the C-Mount package testing.
4. For more information, please contact Hi-Tech Optoelectronics Co., Ltd.



Add: Shahe Industrial Park, Changping District, Beijing, China  
Tel: +86-10-6076 9887      Fax: +86-10-6076 9887-699  
Web: [www.htoe.com.cn](http://www.htoe.com.cn)      Email: [sales@htoe.com.cn](mailto:sales@htoe.com.cn)

